



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
**22.10.2003 Bulletin 2003/43**

(51) Int Cl.7: **C23C 16/40**

(21) Application number: **03008723.3**

(22) Date of filing: **16.04.2003**

(84) Designated Contracting States:  
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR**  
**HU IE IT LI LU MC NL PT RO SE SI SK TR**  
Designated Extension States:  
**AL LT LV MK**

(30) Priority: **17.04.2002 US 373104 P**  
**17.05.2002 US 150798**  
**07.04.2003 US 409468**

(71) Applicant: **AIR PRODUCTS AND CHEMICALS,**  
**INC.**  
**Allentown, PA 18195-1501 (US)**

(72) Inventors:  
• **Vrtis, Raymond Nicholas**  
**Orefield, PA 18069 (US)**

- **O'Neill, Mark Leonard**  
**Allentown, PA 18104 (US)**
- **Vincent, Jean Louise**  
**Bethlehem, PA 18020 (US)**
- **Lukas, Aaron Scott**  
**Landsdale, PA 19446 (US)**
- **Xiao, Manchao**  
**San Diego, CA 92130 (US)**
- **Norman, John Anthony Thomas**  
**Encinitas, CA 92024 (US)**

(74) Representative: **Schwabe - Sandmair - Marx**  
**Stuntzstrasse 16**  
**81677 München (DE)**

(54) **Method for forming a porous SiOCH layer.**

(57) A porous organosilica glass (OSG) film consists of a single phase of a material represented by the formula  $\text{Si}_v\text{O}_w\text{C}_x\text{H}_y\text{F}_z$ , where  $v+w+x+y+z = 100\%$ ,  $v$  is from 10 to 35 atomic%,  $w$  is from 10 to 65 atomic%,  $x$  is from 5 to 30 atomic%,  $y$  is from 10 to 50 atomic% and  $z$  is from 0 to 15 atomic%, wherein the film has pores and a dielectric constant less than 2.6. The film is provided by a chemical vapor deposition method in which a preliminary film is deposited from organosilane and/or or-

ganosiloxane precursors and pore-forming agents (porogens), which can be independent of, or bonded to, the precursors. The porogens are subsequently removed to provide the porous film. Compositions, such as kits, for forming the films include porogens and precursors. Porogenated precursors are also useful for providing the film.

**Description****CROSS-REFERENCES TO RELATED APPLICATIONS**

5 [0001] This application claims priority from provisional U.S. Patent Application No. 60/373,104 filed 17 April 2002, and is a continuation-in-part of U.S. Patent Application No. 10/150,798 filed 17 May 2002, the entire disclosures of which are incorporated by reference herein.

**BACKGROUND OF THE INVENTION**

10 [0002] The present invention is directed to the field of low dielectric constant materials produced by CVD methods as insulating layers in electronic devices.

[0003] The electronics industry utilizes dielectric materials as insulating layers between circuits and components of integrated circuits (IC) and associated electronic devices. Line dimensions are being reduced in order to increase the speed and memory storage capability of microelectronic devices (e.g., computer chips). As the line dimensions decrease, the insulating requirements for the interlayer dielectric (ILD) become much more rigorous. Shrinking the spacing requires a lower dielectric constant to minimize the RC time constant, where R is the resistance of the conductive line and C is the capacitance of the insulating dielectric interlayer. C is inversely proportional to spacing and proportional to the dielectric constant (k) of the interlayer dielectric (ILD). Conventional silica (SiO<sub>2</sub>) CVD dielectric films produced from SiH<sub>4</sub> or TEOS (Si(OCH<sub>2</sub>CH<sub>3</sub>)<sub>4</sub>, tetraethylorthosilicate) and O<sub>2</sub> have a dielectric constant k greater than 4.0. There are several ways in which industry has attempted to produce silica-based CVD films with lower dielectric constants, the most successful being the doping of the insulating silicon oxide film with organic groups providing dielectric constants in the range of 2.7-3.5. This organosilica glass is typically deposited as a dense film (density - 1.5 g/cm<sup>3</sup>) from an organosilicon precursor, such as a methylsilane or siloxane, and an oxidant, such as O<sub>2</sub> or N<sub>2</sub>O. Organosilica glass will be herein be referred to as OSG. As dielectric constant or "k" values drop below 2.7 with higher device densities and smaller dimensions, the industry has exhausted most of the suitable low k compositions for dense films and has turned to various porous materials for improved insulating properties.

[0004] The patents and applications which are known in the field of porous ILD by CVD methods field include: EP 1 119 035 A2 and U.S. Patent No. 6,171,945, which describe a process of depositing an OSG film from organosilicon precursors with labile groups in the presence of an oxidant such as N<sub>2</sub>O and optionally a peroxide, with subsequent removal of the labile group with a thermal anneal to provide porous OSG; U.S. Patents Nos. 6,054,206 and 6,238,751, which teach the removal of essentially all organic groups from deposited OSG with an oxidizing anneal to obtain porous inorganic SiO<sub>2</sub>; EP 1 037 275, which describes the deposition of an hydrogenated silicon carbide film which is transformed into porous inorganic SiO<sub>2</sub> by a subsequent treatment with an oxidizing plasma; and U.S. Patent No. 6,312,793 B1, WO 00/24050, and a literature article Grill, A. Patel, V. Appl. Phys. Lett. (2001), 79(6), pp. 803-805, which all teach the co-deposition of a film from an organosilicon precursor and an organic compound, and subsequent thermal anneal to provide a multiphase OSG/organic film in which a portion of the polymerized organic component is retained. In these latter references the ultimate final compositions of the films indicate residual porogen and a high hydrocarbon film content (80-90 atomic%). It is preferable that the final film retain the SiO<sub>2</sub>-like network, with substitution of a portion of oxygen atoms for organic groups.

[0005] All references disclosed herein are incorporated by reference herein in their entireties.

**BRIEF SUMMARY OF THE INVENTION**

45 [0006] The present invention provides a porous organosilica glass film consisting of a single phase of a material represented by the formula Si<sub>v</sub>O<sub>w</sub>C<sub>x</sub>H<sub>y</sub>F<sub>z</sub>, where v+w+x+y+z = 100%, v is from 10 to 35 atomic%, w is from 10 to 65 atomic%, x is from 5 to 30 atomic%, y is from 10 to 50 atomic% and z is from 0 to 15 atomic%, wherein the film has pores and a dielectric constant less than 2.6.

[0007] The present invention further provides a chemical vapor deposition method for producing the porous organosilica glass film of the invention, comprising: (a) providing a substrate within a vacuum chamber; (b) introducing into the vacuum chamber gaseous reagents including at least one precursor selected from the group consisting of an organosilane and an organosiloxane, and a porogen distinct from the at least one precursor; (c) applying energy to the gaseous reagents in the vacuum chamber to induce reaction of the gaseous reagents to deposit a preliminary film on the substrate, wherein the preliminary film contains the porogen, and the preliminary film is deposited without added oxidants; and (d) removing from the preliminary film substantially all of the porogen to provide the porous film with pores and a dielectric constant less than 2.6.

[0008] Still further provided is a chemical vapor deposition method for producing the porous organosilica glass film of the invention, comprising: (a) providing a substrate within a vacuum chamber; (b) introducing into the vacuum cham-

ber gaseous reagents including at least one precursor selected from the group consisting of a organosilane and an organosiloxane, wherein the at least one precursor contains at least one porogen bonded thereto; (c) applying energy to the gaseous reagents in the vacuum chamber to induce reaction of the gaseous reagents to deposit a preliminary film on the substrate, wherein the preliminary film contains the at least one porogen and a first quantity of methyl groups bonded to silicon atoms; and (d) removing from the preliminary film at least a portion of the at least one porogen to provide the porous film with pores and a dielectric constant less than 2.6, wherein the porous film contains a second quantity of methyl groups bonded to silicon atoms, and the second quantity is more than 50% of the first quantity.

**[0009]** Also provided are novel porogenated precursors for producing porous organosilica glass films, including porogenated 1,3,5,7-tetramethylcyclo-tetrasiloxanes, such as neohexyl-1,3,5,7-tetramethylcyclo-tetrasiloxane and trimethylsilylethyl-1,3,5,7-tetramethylcyclo-tetrasiloxane.

**[0010]** Still further provided are novel compositions containing porogens and precursors (porogenated and/or non-porogenated) for producing the films of the invention.

#### BRIEF DESCRIPTION OF SEVERAL VIEWS OF THE DRAWINGS

**[0011]** FIG. 1 shows infrared spectra of a film of the present invention using thermally labile group admixed therewith before and after a post anneal indicating the elimination of the thermally labile group.

**[0012]** FIG. 2 is an infrared spectrum of the film of the present invention identifying the peaks of the components of the film.

**[0013]** FIG. 3 is an infrared spectrum of ATP, a thermally labile group useful as a pore forming additive in the present invention.

**[0014]** FIG. 4 is a thermogravimetric analysis of the film of the present invention during anneal indicating weight loss resulting from the loss of thermally labile group from the film.

#### DETAILED DESCRIPTION OF THE INVENTION

**[0015]** Organosilicates are candidates for low k materials, but without the addition of porogens to add porosity to these materials, their inherent dielectric constant is limited to as low as 2.7. The addition of porosity, where the void space has an inherent dielectric constant of 1.0, reduces the overall dielectric constant of the film, generally at the cost of mechanical properties. Materials properties depend upon the chemical composition and structure of the film. Since the type of organosilicon precursor has a strong effect upon the film structure and composition, it is beneficial to use precursors that provide the required film properties to ensure that the addition of the needed amount of porosity to reach the desired dielectric constant does not produce films that are mechanically unsound. Thus, the invention provides the means to generate porous OSG films that have a desirable balance of electrical and mechanical properties. Other film properties often track with electrical or mechanical properties.

**[0016]** Preferred embodiments of the invention provide a thin film material having a low dielectric constant and improved mechanical properties, thermal stability, and chemical resistance (to oxygen, aqueous oxidizing environments, etc.) relative to other porous organosilica glass materials. This is the result of the incorporation into the film of carbon (preferably predominantly in the form of organic carbon,  $-CH_x$ , where x is 1 to 3, more preferably the majority of C is in the form of  $-CH_3$ ) whereby specific precursor or network-forming chemicals are used to deposit films in an environment free of oxidants (other than the optional additive/carrier gas  $CO_2$ , to the extent it is deemed to function as an oxidant). It is also preferred that most of the hydrogen in the film is bonded to carbon.

**[0017]** Thus, preferred embodiments of the invention comprise: (a) about 10 to about 35 atomic%, more preferably about 20 to about 30% silicon; (b) about 10 to about 65 atomic%, more preferably about 20 to about 45 atomic% oxygen; (c) about 10 to about 50 atomic%, more preferably about 15 to about 40 atomic% hydrogen; (d) about 5 to about 30 atomic%, more preferably about 5 to about 20 atomic% carbon. Films may also contain about 0.1 to about 15 atomic%, more preferably about 0.5 to about 7.0 atomic% fluorine, to improve one or more of materials properties. Lesser portions of other elements may also be present in certain films of the invention. OSG materials are considered to be low k materials as their dielectric constant is less than that of the standard material traditionally used in the industry - silica glass. The materials of the invention can be provided by adding pore-forming species or porogens to the deposition procedure, incorporating the porogens into the as-deposited (i.e., preliminary) OSG film and removing substantially all of the porogens from the preliminary film while substantially retaining the terminal  $Si-CH_3$  groups of the preliminary film to provide the product film. The product film is porous OSG and has a dielectric constant reduced from that of the preliminary film as well as from an analogous film deposited without porogens. It is important to distinguish the film of the present invention as porous OSG, as opposed to a porous inorganic  $SiO_2$ , which lacks the hydrophobicity provided by the organic groups in OSG.

**[0018]** Silica produced by PE-CVD TEOS has an inherent free volume pore size determined by positron annihilation lifetime spectroscopy (PALS) analysis to be about 0.6 nm in equivalent spherical diameter. The pore size of the inventive

films as determined by small angle neutron scattering (SANS) or PALS is preferably less than 5 nm in equivalent spherical diameter, more preferably less than 2.5 nm in equivalent spherical diameter.

**[0019]** Total porosity of the film may be from 5 to 75% depending upon the process conditions and the desired final film properties. Films of the invention preferably have a density of less than 2.0 g/ml, or alternatively, less than 1.5 g/ml or less than 1.25 g/ml. Preferably, films of the invention have a density at least 10% less than that of an analogous OSG film produced without porogens, more preferably at least 20% less.

**[0020]** The porosity of the film need not be homogeneous throughout the film. In certain embodiments, there is a porosity gradient and/or layers of varying porosities. Such films can be provided by, e.g., adjusting the ratio of porogen to precursor during deposition.

**[0021]** Films of the invention have a lower dielectric constant relative to common OSG materials. Preferably, films of the invention have a dielectric constant at least 0.3 less than that of an analogous OSG film produced without porogens, more preferably at least 0.5 less. Preferably a Fourier transform infrared (FTIR) spectrum of a porous film of the invention is substantially identical to a reference FTIR of a reference film prepared by a process substantially identical to the method except for a lack of any porogen.

**[0022]** Films of the invention preferably have superior mechanical properties relative to common OSG materials. Preferably, the base OSG structure of the films of the invention (e.g., films that have not had any added porogen) has a hardness or modulus measured by nanoindentation at least 10% greater, more preferably 25% greater, than that of an analogous OSG film at the same dielectric constant.

**[0023]** Films of the invention do not require the use of an oxidant to deposit a low k film. The absence of added oxidant to the gas phase, which is defined for present purposes as a moiety that could oxidize organic groups (e.g., O<sub>2</sub>, N<sub>2</sub>O, ozone, hydrogen peroxide, NO, NO<sub>2</sub>, N<sub>2</sub>O<sub>4</sub>, or mixtures thereof), facilitates the retention of the methyl groups of the precursor in the film. This allows the incorporation of the minimum amount of carbon necessary to provide desired properties, such as reduced dielectric constant and hydrophobicity. As well, this tends to provide maximum retention of the silica network, providing films that have superior mechanical properties, adhesion, and etch selectivity to common etch stop materials (e.g., silicon carbide, hydrogenated silicon carbide, silicon nitride, hydrogenated silicon nitride, etc.), since the film retains characteristics more similar to silica, the traditional dielectric insulator.

**[0024]** Films of the invention may also contain fluorine, in the form of inorganic fluorine (e.g., Si-F). Fluorine, when present, is preferably contained in an amount ranging from 0.5 to 7 atomic%.

**[0025]** Films of the invention are thermally stable, with good chemical resistance. In particular, preferred films after anneal have an average weight loss of less than 1.0 wt%/hr isothermal at 425°C under N<sub>2</sub>. Moreover, the films preferably have an average weight loss of less than 1.0 wt%/hr isothermal at 425°C under air.

**[0026]** The films are suitable for a variety of uses. The films are particularly suitable for deposition on a semiconductor substrate, and are particularly suitable for use as, e.g., an insulation layer, an interlayer dielectric layer and/or an intermetal dielectric layer. The films can form a conformal coating. The mechanical properties exhibited by these films make them particularly suitable for use in Al subtractive technology and Cu damascene or dual damascene technology.

**[0027]** The films are compatible with chemical mechanical planarization (CMP) and anisotropic etching, and are capable of adhering to a variety of materials, such as silicon, SiO<sub>2</sub>, Si<sub>3</sub>N<sub>4</sub>, OSG, FSG, silicon carbide, hydrogenated silicon carbide, silicon nitride, hydrogenated silicon nitride, silicon carbonitride, hydrogenated silicon carbonitride, boronitride, antireflective coatings, photoresists, organic polymers, porous organic and inorganic materials, metals such as copper and aluminum, and diffusion barrier layers such as but not limited to TiN, Ti(C)N, TaN, Ta(C)N, Ta, W, WN or W(C)N. The films are preferably capable of adhering to at least one of the foregoing materials sufficiently to pass a conventional pull test, such as ASTM D3359-95a tape pull test. A sample is considered to have passed the test if there is no discernible removal of film.

**[0028]** Thus in certain embodiments, the film is an insulation layer, an interlayer dielectric layer, an intermetal dielectric layer, a capping layer, a chemical-mechanical planarization or etch stop layer, a barrier layer or an adhesion layer in an integrated circuit.

**[0029]** Although the invention is particularly suitable for providing films and products of the invention are largely described herein as films, the invention is not limited thereto. Products of the invention can be provided in any form capable of being deposited by CVD, such as coatings, multilaminar assemblies, and other types of objects that are not necessarily planar or thin, and a multitude of objects not necessarily used in integrated circuits. Preferably, the substrate is a semiconductor.

**[0030]** In addition to the inventive OSG products, the present invention includes the process by which the products are made, methods of using the products and compounds and compositions useful for preparing the products.

**[0031]** It is within the scope of the invention for a single species of molecule to function as both the structure-former and porogen. That is, the structure-forming precursor and the pore-forming precursor are not necessarily different molecules, and in certain embodiments the porogen is a part of (e.g., covalently bound to) the structure-forming precursor. Precursors containing porogens bound to them are sometimes referred to hereinafter as "porogenated precursors". For example, it is possible to use neohexyl TMCTS as a single species, whereby the TMCTS portion of the

molecule forms the base OSG structure and the bulky alkyl substituent neohexyl is the pore forming species which is removed during the anneal process. Having the porogen attached to a Si species that will network into the OSG structure may be advantageous in achieving a higher efficiency of incorporation of porogen into the film during the deposition process. Furthermore, it may also be advantageous to have two porogens attached to one Si in the precursor, such as in di-neohexyl-diethoxysilane, or two Si's attached to one porogen, such as in 1,4-bis(diethoxysilyl)cyclohexane, since the most likely bond to break in a plasma during the deposition process is the Si-Porogen bond. In this manner, reaction of one Si-Porogen bond in the plasma will still result in incorporation of the porogen in the deposited film. Additional non-limiting examples of preferred porogenated precursors include 1-neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane, 1-neopentyl-1,3,5,7-tetramethylcyclotetrasiloxane, neopentyl-diethoxysilane, neohexyl-diethoxysilane, neohexyltriethoxysilane, neopentyltriethoxysilane and neopentyl-di-t-butoxysilane.

**[0032]** In certain embodiments of the materials in which a single or multiple porogen is attached to a silicon, it may be advantageous to design the porogen in such a way that when the film is cured to form the pores, a part of the porogen remains attached to the silicon to impart hydrophobicity to the film. The porogen in a precursor containing Si-Porogen may be chosen such that decomposition or curing leaves attached to the Si a terminal chemical group from the porogen, such as a  $-CH_3$ . For example, if the porogen neopentyl is chosen, it is expected that thermal annealing under the proper conditions would cause bond breakage at the C-C bonds beta to the Si, that is the bond between the secondary carbon adjacent to Si and the quaternary carbon of the t-butyl group will thermodynamically be the most favorable bond to break. Under proper conditions this would leave a terminal  $-CH_3$  group to satisfy the Si, as well as provide hydrophobicity and a low dielectric constant to the film. Examples of precursors are neopentyl triethoxysilane, neopentyl diethoxy silane, and neopentyl diethoxymethylsilane.

**[0033]** The porogen in the deposited film may or may not be in the same form as the porogen introduced to the reaction chamber. As well, the porogen removal process may liberate the porogen or fragments thereof from the film. In essence, the porogen reagent (or porogen substituent attached to the precursor), the porogen in the preliminary film, and the porogen being removed may or may not be the same species, although it is preferable that they all originate from the porogen reagent (or porogen substituent). Regardless of whether or not the porogen is unchanged throughout the inventive process, the term "porogen" as used herein is intended to encompass pore-forming reagents (or pore-forming substituents) and derivatives thereof, in whatever forms they are found throughout the entire process of the invention.

**[0034]** Other aspects of this invention are novel organosilanes and organosiloxanes. Novel porogen-containing (i.e., porogenated) materials synthesized for use as low dielectric constant precursors, such as neohexyl TMCTS and trimethylsilyl ethyl TMCTS, may also have potential applications in other areas. The novel organosilanes of this invention are easily prepared by hydrosilylation reactions of the olefin precursor with either TMCTS or diethoxymethylsilane. For example, dropwise addition of either diethoxymethylsilane or TMCTS to a molar equivalent of distilled 3,3-dimethylbutene in the presence of chloroplatinic acid catalyst affords the neohexyl-substituted silanes neohexyl diethoxymethylsilane and neohexyl tetramethylcyclotetrasiloxane in high yields.

**[0035]** Although the phrase "gaseous reagents" is sometimes used herein to describe the reagents, the phrase is intended to encompass reagents delivered directly as a gas to the reactor, delivered as a vaporized liquid, a sublimed solid and/or transported by an inert carrier gas into the reactor.

**[0036]** In addition, the reagents can be carried into the reactor separately from distinct sources or as a mixture. The reagents can be delivered to the reactor system by any number of means, preferably using a pressurizable stainless steel vessel fitted with the proper valves and fittings to allow the delivery of liquid to the process reactor.

**[0037]** In certain embodiments, mixtures of different organosilanes and/or organosiloxanes are used in combination. It is also within the scope of the invention to use combinations of multiple different porogens, and organosilanes and/or organosiloxanes in combination with organosilane and/or organosiloxane species with attached porogens. Such embodiments facilitate adjusting the ratio of pores to Si in the final product, and/or enhance one or more critical properties of the base OSG structure. For example, a deposition utilizing diethoxymethylsilane (DEMS) and porogen might use an additional organosilicon such as tetraethoxysilane (TEOS) to improve the film mechanical strength. A similar example may be the use of DEMS added to the reaction using the organosilicon neohexyl-diethoxymethylsilane, where the neohexyl group bound to the precursor functions as the porogen. A further example would be the addition of di-tert-butoxy-diacetoxysilane to the reaction using di-tert-butoxymethylsilane and porogen. In certain embodiments, a mixture of a first organosilicon precursor with two or fewer Si-O bonds with a second organosilicon precursor with three or more Si-O bonds, is provided to tailor a chemical composition of the inventive film.

**[0038]** In addition to the structure forming species and the pore-forming species, additional materials can be charged into the vacuum chamber prior to, during and/or after the deposition reaction. Such materials include, e.g., inert gas (e.g., He, Ar,  $N_2$ , Kr, Xe, etc., which may be employed as a carrier gas for lesser volatile precursors and/or which can promote the curing of the as-deposited materials and provide a more stable final film) and reactive substances, such as gaseous or liquid organic substances,  $NH_3$ ,  $H_2$ ,  $CO_2$ , or CO.  $CO_2$  is the preferred carrier gas.

**[0039]** Energy is applied to the gaseous reagents to induce the gases to react and to form the film on the substrate.

Such energy can be provided by, e.g., thermal, plasma, pulsed plasma, helicon plasma, high density plasma, inductively coupled plasma, and remote plasma methods. A secondary rf frequency source can be used to modify the plasma characteristics at the substrate surface. Preferably, the film is formed by plasma enhanced chemical vapor deposition. It is particularly preferred to generate a capacitively coupled plasma at a frequency of 13.56 MHz. Plasma power is preferably from 0.02 to 7 watts/cm<sup>2</sup>, more preferably 0.3 to 3 watts/cm<sup>2</sup>, based upon a surface area of the substrate. It may be advantageous to employ a carrier gas which possesses a low ionization energy to lower the electron temperature in the plasma which in turn will cause less fragmentation in the OSG precursor and porogen. Examples of this type of low ionization gas include CO<sub>2</sub>, NH<sub>3</sub>, CO, CH<sub>4</sub>, Ar, Xe, Kr.

**[0040]** The flow rate for each of the gaseous reagents preferably ranges from 10 to 5000 sccm, more preferably from 30 to 1000 sccm, per single 200 mm wafer. The individual rates are selected so as to provide the desired amounts of structure-former and pore-former in the film. The actual flow rates needed may depend upon wafer size and chamber configuration, and are in no way limited to 200 mm wafers or single wafer chambers.

**[0041]** It is preferred to deposit the film at a deposition rate of at least 50 nm/min.

**[0042]** The pressure in the vacuum chamber during deposition is preferably 0.01 to 600 torr, more preferably 1 to 15 torr.

**[0043]** The film is preferably deposited to a thickness of 0.002 to 10 microns, although the thickness can be varied as required. The blanket film deposited on a non-patterned surface has excellent uniformity, with a variation in thickness of less than 2% over 1 standard deviation across the substrate with a reasonable edge exclusion, wherein e.g., a 5mm outermost edge of the substrate is not included in the statistical calculation of uniformity.

**[0044]** The porosity of the film can be increased with the bulk density being correspondingly decreased to cause further reduction in the dielectric constant of the material and extending the applicability of this material to future generations (e.g.,  $k < 2.0$ ).

**[0045]** The removal of substantially all porogen is assumed if there is no statistically significant measured difference in atomic composition between the annealed porous OSG and the analogous OSG without added porogen. The inherent measurement error of the analysis method for composition (e.g., X-ray photoelectron spectroscopy (XPS), Rutherford Backscattering / Hydrogen Forward Scattering (RBS/HFS)) and process variability both contribute to the range of the data. For XPS the inherent measurement error is Approx: +/- 2 atomic%, while for RBS/HFS this is expected to be larger, ranging from +/- 2 to 5 atomic% depending upon the species. The process variability will contribute a further +/- 2 atomic% to the final range of the data.

**[0046]** The following are non-limiting examples of Si-based precursors suitable for use with a distinct porogen. In the chemical formulas which follow and in all chemical formulas throughout this document, the term "independently" should be understood to denote that the subject R group is not only independently selected relative to other R groups bearing different superscripts, but is also independently selected relative to any additional species of the same R group. For example, in the formula  $R^1_n(OR^2)_{4-n}Si$ , when n is 2 or 3, the two or three R<sup>1</sup> groups need not be identical to each other or to R<sup>2</sup>.

- $R^1_n(OR^2)_{3-n}Si$  where R<sup>1</sup> can be independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> can be independently C<sub>1</sub> to C<sub>6</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3.

- Example: diethoxymethylsilane, dimethyldimethoxysilane

- $R^1_n(OR^2)_{3-n}Si-SiR^3_m(OR^4)_{3-m}$  where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>6</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

- Example: 1,3-dimethyl-1,3-diethoxydisiloxane

- $R^1_n(OR^2)_{3-n}Si-SiR^3_m(OR^4)_{3-m}$  where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>6</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

- Example: 1,2-dimethyl-1,1,2,2-tetraethoxydisilane

- $R^1_n(O(O)CR^2)_{4-n}Si$  where R<sup>1</sup> can be independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> can be independently H, C<sub>1</sub> to C<sub>6</sub>, linear or branched, saturated,

singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3.

- Example: dimethyldiacetoxysilane

- 5 -  $R^1_n(O(O)CR^2)_{3-n}Si-O-SiR^3_m(O(O)CR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  and  $R^4$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

10 - Example: 1,3-dimethyl-1,3-diacetoxidisiloxane

- $R^1_n(O(O)CR^2)_{3-n}Si-SiR^3_m(O(O)CR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  and  $R^4$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

- Example: 1,2-dimethyl-1,1,2,2-tetraacetoxidisilane

- 20 -  $R^1_n(O(O)CR^2)_{3-n}Si-O-SiR^3_m(OR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$  can be independently  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

25 - Example: 1,3-dimethyl-1-acetoxy-3-ethoxydisiloxane

- $R^1_n(O(O)CR^2)_{3-n}Si-SiR^3_m(OR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated and  $R^4$  can be independently  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.

- Example: 1,2-dimethyl-1-acetoxy-2-ethoxydisilane

- 35 -  $R^1_n(OR^2)_p(O(O)CR^4)_{4-(n+p)}Si$  where  $R^1$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated,  $R^2$  can be independently  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated and  $R^4$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, and n is 1 to 3 and p is 1 to 3.

40 - Example: methylacetox-y-t-butoxysilane

- $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  and  $R^6$  can be independently  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$  and  $R^5$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3, m is 1 to 3, p is 1 to 3 and q is 1 to 3.

- Example: 1,3-dimethyl-1,3-diacetoxy-1,3-diethoxydisiloxane

- 50 -  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$ ,  $R^6$  can be independently  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$ ,  $R^5$  can be independently H,  $C_1$  to  $C_6$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3, m is 1 to 3, p is 1 to 3 and q is 1 to 3.

- Example: 1,2-dimethyl-1,2-diacetoxy-1,2-diethoxydisilane

- cyclic siloxanes of the formula  $(\text{OSiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  can be independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8.

Examples: 1,3,5,7-tetramethylcyclotetrasiloxane, octamethylcyclotetrasiloxane

[0047] Provisos to all above precursor groups: 1) the reaction environment is essentially non-oxidative and /or has no oxidant added to the reaction mixture (other than the optional addition of  $\text{CO}_2$  to the extent it is deemed an oxidant), 2) a porogen is added to the reaction mixture, and 3) a curing (e.g., anneal) step is used to remove substantially all of the included porogen from the deposited film to produce a  $k < 2.6$ .

[0048] The above precursors may be mixed with porogen or have attached porogens, and may be mixed with other molecules of these classes and/or with molecules of the same classes except where n and /or m are from 0 to 3.

- Examples: TEOS, triethoxysilane, di-tertiarybutoxysilane, silane, disilane, di-tertiarybutoxydiacetoxysilane, etc.

[0049] The following are additional formulas representing certain Si-based precursors suitable for use with a distinct porogen:

(a) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3 and p is 0 to 3;

(b) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-O-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  and  $\text{R}^6$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$  and  $m+q \leq 3$ ;

(c) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  and  $\text{R}^6$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$  and  $m+q \leq 3$ ;

(d) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-R}^7\text{-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$ ,  $\text{R}^6$  and  $\text{R}^7$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ , and  $m+q \leq 3$ ;

(e) the formula  $(\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si})_t\text{CH}_{4-t}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that  $n+p \leq 4$ ;

(f) the formula  $(\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si})_t\text{NH}_{3-t}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that  $n+p \leq 4$ ;

(g) cyclic siloxanes of the formula  $(\text{OSiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8;

(h) cyclic silazanes of the formula  $(\text{NR}_1\text{SiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8,; and

(i) cyclic carbosilanes of the formula  $(\text{CR}_1\text{R}_3\text{SiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8,.



[0050] Although reference is made throughout the specification to siloxanes and disiloxanes as precursors and porogenated precursors, it should be understood that the invention is not limited thereto, and that other siloxanes, such as trisiloxanes and other linear siloxanes of even greater length, are also within the scope of the invention.

[0051] The following are non-limiting examples of Si-based porogenated precursors, where the porogen material is one or more of R<sup>1</sup>, R<sup>3</sup> or R<sup>7</sup>:

- R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>3-n</sub>Si where R<sup>1</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> can be independently C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3.  
 10      - Example: diethoxy-neo-hexylsilane
- R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>3-n</sub>Si-O-SiR<sup>3</sup><sub>m</sub>(OR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.  
 15      - Example: 1,3-diethoxy-1-neo-hexyldisiloxane
- R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>3-n</sub>Si-SiR<sup>3</sup><sub>m</sub>(OR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.  
 20      - Example: 1,2-diethoxy-1-neo-hexyldisilane
- R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>3-n</sub>Si-R<sup>7</sup>-SiR<sup>3</sup><sub>m</sub>(OR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, R<sup>7</sup> is C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and bridges the two Si atoms, n is 1 to 3 and m is 1 to 3.  
 25      - Example: 1,4-bis(dimethoxysilyl)cyclohexane
- R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>3-n</sub>Si-SiR<sup>3</sup><sub>m</sub>(OR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, R<sup>2</sup> and R<sup>4</sup> can be independently C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.  
 30      - Example: 1,2-diethoxy-1-neo-hexyldisilane
- R<sup>1</sup><sub>n</sub>(O(O)CR<sup>2</sup>)<sub>4-n</sub>Si where R<sup>1</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3.  
 35      - Example: diacetoxo-neo-hexylsilane
- R<sup>1</sup><sub>n</sub>(O(O)CR<sup>2</sup>)<sub>3-n</sub>Si-O-SiR<sup>3</sup><sub>m</sub>(O(O)CR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> and R<sup>4</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.  
 40      - Example: 1,3-diacetoxo-1-neo-hexyldisiloxane
- R<sup>1</sup><sub>n</sub>(O(O)CR<sup>2</sup>)<sub>3-n</sub>Si-SiR<sup>3</sup><sub>m</sub>(O(O)CR<sup>4</sup>)<sub>3-m</sub> where R<sup>1</sup> and R<sup>3</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated; R<sup>2</sup> and R<sup>4</sup> can be independently H, C<sub>1</sub> to C<sub>12</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.  
 45      - Example: 1,3-diacetoxo-1-neo-hexyldisiloxane

- Example: 1,2-diacetoxy-1-neo-hexyldisilane
- $R^1_n(O(O)CR^2)_{3-n}Si-O-SiR^3_m(OR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$  can be independently  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.
- Example: 1-acetoxy-3,3-di-t-butoxy-1-neohexyldisiloxane
- $R^1_n(O(O)CR^2)_{3-n}Si-SiR^3_m(OR^4)_{3-m}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$  can be independently  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3 and m is 1 to 3.
- Example: 1-acetoxy-2,2-di-t-butoxy-1-neohexyldisilane
- $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated,  $R^2$  can be independently  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated;  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, and n is 1 to 3 and p is 1 to 3.
- Example: acetoxy-t-butoxy-neo-hexylsilane
- $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$ ,  $R^6$  can be independently  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$   $R^5$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3, m is 1 to 3, p is 1 to 3 and q is 1 to 3.
- Example: 1,3-diacetoxy-1,3-di-t-butoxy-1-neohexyldisiloxane
- $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated;  $R^2$ ,  $R^6$  can be independently  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated,  $R^4$   $R^5$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated, n is 1 to 3, m is 1 to 3, p is 1 to 3 and q is 1 to 3.
- Example: 1,2-diacetoxy-1,2-di-t-butoxy-1-neohexyldisilane
- cyclic siloxanes of the formula  $(OSiR^1R^3)_x$ , where  $R^1$  and  $R^3$  can be independently H,  $C_1$  to  $C_{12}$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8.
- Example: such as 1-neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane

**[0052]** Provisos to all above groups: 1) the reaction environment is essentially non-oxidative and/or has no added oxidant (other than the optional addition of  $CO_2$  to the extent it is deemed an oxidant) to the reaction mixture, 2) it is preferred that at least one of  $R^1$ ,  $R^3$  and  $R^7$  have a  $C_3$  or larger hydrocarbon to act as pore former, and 3) a curing step (e.g., thermal annealing) is used to remove at least a portion of the included porogen, and preferably substantially all of the included porogen, from the deposited film to produce a dielectric constant less than 2.6.

**[0053]** The above precursors may be mixed with other molecules of these same classes and/or with molecules of the same classes except where n and/or m are from 0 to 3.

**[0054]** Alternatively, non-limiting examples of suitable Si-based porogenated precursors are represented by the following formulas:

(a) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, satu-

rated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3 and  $p$  is 0 to 3, provided that at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(b) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(c) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(d) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-R^7-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$ ,  $R^6$ , and  $R^7$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$ ,  $R^3$  and  $R^7$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(e) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tCH_{4-t}$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3,  $p$  is 0 to 3, and  $t$  is 2 to 4, provided that  $n+p \leq 4$  and at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(f) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tNH_{3-t}$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3,  $p$  is 0 to 3 and  $t$  is 1 to 3, provided that  $n+p \leq 4$  and at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(g) cyclic siloxanes of the formula  $(OSiR_1R_3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

(h) cyclic silazanes of the formula  $(NR_1SiR_1R_3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen; or

(i) cyclic carbosilanes of the formula  $(CR_1R_3SiR_1R_3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen.

[0055] The following are non-limiting examples of materials suitable for use as porogens of the invention:

[0056] 1) Cyclic hydrocarbons of the general formula  $C_nH_{2n}$  where  $n = 4 - 14$ , where the number of carbons in the cyclic structure is between 4 and 10, and where there can be a plurality of simple or branched hydrocarbons substituted onto the cyclic structure.

Examples include: cyclohexane, trimethylcyclohexane, 1-methyl-4(1-methylethyl)cyclohexane, cyclooctane, methylcyclooctane, etc.

[0057] 2) Linear or branched, saturated, singly or multiply unsaturated hydrocarbons of the general formula  $C_nH_{(2n+2)-2y}$  where  $n = 2 - 20$  and where  $y = 0 - n$ .

Examples include: ethylene, propylene, acetylene, neohexane, etc.

[0058] 3) Singly or multiply unsaturated cyclic hydrocarbons of the general formula  $C_nH_{2n-2x}$  where  $x$  is the number

of unsaturated sites in the molecule,  $n = 4 - 14$ , where the number of carbons in the cyclic structure is between 4 and 10, and where there can be a plurality of simple or branched hydrocarbons substituted onto the cyclic structure. The unsaturation can be located inside endocyclic or on one of the hydrocarbon substituents to the cyclic structure.

5 Examples include cyclohexene, vinylcyclohexane, dimethylcyclohexene, t-butylcyclohexene, alpha-terpinene, pinene, 1,5-dimethyl-1,5-cyclooctadiene, vinyl-cyclohexene, etc.

10 **[0059]** 4) Bicyclic hydrocarbons of the general formula  $C_nH_{2n-2}$  where  $n = 4 - 14$ , where the number of carbons in the bicyclic structure is between 4 and 12, and where there can be a plurality of simple or branched hydrocarbons substituted onto the cyclic structure.

Examples include, norbornane, spiro-nonane, decahydronaphthalene, etc.

15 **[0060]** 5) Multiply unsaturated bicyclic hydrocarbons of the general formula  $C_nH_{2n-(2+2x)}$  where  $x$  is the number of unsaturated sites in the molecule,  $n = 4 - 14$ , where the number of carbons in the bicyclic structure is between 4 and 12, and where there can be a plurality of simple or branched hydrocarbons substituted onto the cyclic structure. The unsaturation can be located inside endocyclic or on one of the hydrocarbon substituents to the cyclic structure.

20 Examples include camphene, norbornene, norbornadiene, etc.

**[0061]** 6) Tricyclic hydrocarbons of the general formula  $C_nH_{2n-4}$  where  $n = 4 - 14$ , where the number of carbons in the tricyclic structure is between 4 and 12, and where there can be a plurality of simple or branched hydrocarbons substituted onto the cyclic structure.

25 Examples include adamantane.

**[0062]** The invention further provides compositions for conducting the inventive process. A composition of the invention preferably comprises:

30 (A) at least one porogenated precursor represented by:

(1) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3 and  $p$  is 0 to 3, provided that  $n+p \leq 4$ , and that at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

35 (2) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

40 (3) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;

45 (4) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-R^7-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$ ,  $R^6$ , and  $R^7$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$ ,  $R^3$  and  $R^7$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen; or

50 (5) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tCH_{4-t}$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3,  $p$  is 0 to 3, and  $t$  is 2 to 4, provided that  $n+p \leq 4$  and at

least one of R<sup>1</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(6) the formula  $(R^1)_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tNH_{3-t}$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>3</sup> are independently C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that n+p ≤ 4 and at least one of R<sup>1</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(7) cyclic siloxanes of the formula  $(OSiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(8) cyclic silazanes of the formula  $(NR_1SiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen; or

(9) cyclic carbosilanes of the formula  $(CR_1R_3SiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen; or

(B)(1) at least one precursor selected from the group consisting of:

(a) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3 and p is 0 to 3;

(b) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>6</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3 and m+q ≤ 3;

(c) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>6</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3 and m+q ≤ 3;

(d) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-R^7-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup>, R<sup>6</sup> and R<sup>7</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3, and m+q ≤ 3;

(e) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tCH_{4-t}$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that n+p ≤ 4;

(f) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tNH_{3-t}$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that n+p ≤ 4;

(g) cyclic siloxanes of the formula  $(OSiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any

integer from 2 to 8;

(h) cyclic silazanes of the formula  $(\text{NR}_1\text{SiR}_2\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8; and

(i) cyclic carbosilanes of the formula  $(\text{CR}_1\text{R}_2\text{SiR}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated, and x may be any integer from 2 to 8, and

(B)(2) a porogen distinct from the at least one precursor, said porogen being at least one of:

(a) at least one cyclic hydrocarbon having a cyclic structure and the formula  $\text{C}_n\text{H}_{2n}$ , where n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one cyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure;

(b) at least one linear or branched, saturated, singly or multiply unsaturated hydrocarbon of the general formula  $\text{C}_n\text{H}_{(2n+2)-2y}$  where n = 2 - 20 and where y = 0 - n;

(c) at least one singly or multiply unsaturated cyclic hydrocarbon having a cyclic structure and the formula  $\text{C}_n\text{H}_{2n-2x}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one singly or multiply unsaturated cyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents;

(d) at least one bicyclic hydrocarbon having a bicyclic structure and the formula  $\text{C}_n\text{H}_{2n-2}$ , where n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one bicyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the bicyclic structure;

(e) at least one multiply unsaturated bicyclic hydrocarbon having a bicyclic structure and the formula  $\text{C}_n\text{H}_{2n-(2+2x)}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one multiply unsaturated bicyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the bicyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents; and/or

(f) at least one tricyclic hydrocarbon having a tricyclic structure and the formula  $\text{C}_n\text{H}_{2n-4}$ , where n is 4 to 14, a number of carbons in the tricyclic structure is from 4 to 12, and the at least one tricyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure.

**[0063]** In certain embodiments of the composition comprising a porogenated precursor, the composition preferably includes at least one porogenated precursor selected from the group consisting of neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane and trimethylsilyl-1,3,5,7-tetramethylcyclotetrasiloxane.

**[0064]** In certain embodiments of the composition comprising a porogen-free precursor, the composition preferably comprises:

(a)

(i) at least one precursor selected from the group consisting of diethoxymethylsilane, dimethoxymethylsilane, di-isopropoxymethylsilane, di-t-butoxymethylsilane, methyltriethoxysilane, methyltrimethoxysilane, methyltriisopropoxysilane, methyltri-t-butoxysilane, dimethyldimethoxysilane, dimethyldiethoxysilane, dimethyldi-isopropoxysilane, dimethyldi-t-butoxysilane, 1,3,5,7-tetramethylcyclotetrasiloxane, octamethyl-cyclotetrasiloxane and tetraethoxysilane, and

(ii) a porogen distinct from the at least one precursor, said porogen being a member selected from the group consisting of alpha-terpinene, limonene, cyclohexane, 1,2,4-trimethylcyclohexane, 1,5-dimethyl-1,5-cyclooctadiene, camphene, adamantane, 1,3-butadiene, substituted dienes and decahydronaphthalene; and/or

(b)

(i) at least one precursor selected from the group consisting of trimethylsilane, tetramethylsilane, diethoxymethylsilane, dimethoxymethylsilane, di-tert-butoxymethylsilane, methyltriethoxysilane, dimethyldimethoxysilane, dimethyldiethoxysilane, methyltriacetoxysilane, methyldiacetoxysilane, methylethoxydisiloxane, tetramethylcyclotetrasiloxane, octamethylcyclotetrasiloxane, dimethyldiacetoxysilane, bis(trimethoxysilyl)methane, bis(dimethoxysilyl)methane, tetraethoxysilane and triethoxysilane, and (ii) alpha-terpinene, gamma-terpinene, limonene, dimethylhexadiene, ethylbenzene, decahydronaphthalene, 2-carene, 3-carene, vinylcyclohexene and dimethylcyclooctadiene.

**[0065]** Compositions of the invention can further comprise, e.g., at least one pressurizable vessel (preferably of stainless steel) fitted with the proper valves and fittings to allow the delivery of porogen, non-porogenated precursor and/or porogenated precursor to the process reactor. The contents of the vessel(s) can be premixed. Alternatively, porogen and precursor can be maintained in separate vessels or in a single vessel having separation means for maintaining the porogen and precursor separate during storage. Such vessels can also have means for mixing the porogen and precursor when desired.

**[0066]** The porogen is removed from the preliminary (or as-deposited) film by a curing step, which can comprise thermal annealing, chemical treatment, in-situ or remote plasma treating, photocuring and/or microwaving. Other in-situ or post-deposition treatments may be used to enhance materials properties like hardness, stability (to shrinkage, to air exposure, to etching, to wet etching, etc.), integrability, uniformity and adhesion. Such treatments can be applied to the film prior to, during and/or after porogen removal using the same or different means used for porogen removal. Thus, the term "post-treating" as used herein denotes treating the film with energy (e.g., thermal, plasma, photon, electron, microwave, etc.) or chemicals to remove porogens and, optionally, to enhance materials properties.

**[0067]** The conditions under which post-treating are conducted can vary greatly. For example, post-treating can be conducted under high pressure or under a vacuum ambient.

**[0068]** Annealing is conducted under the following conditions.

**[0069]** The environment can be inert (e.g., nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing (e.g., oxygen, air, dilute oxygen environments, enriched oxygen environments, ozone, nitrous oxide, etc.) or reducing (dilute or concentrated hydrogen, hydrocarbons (saturated, unsaturated, linear or branched, aromatics), etc.). The pressure is preferably about 1 Torr to about 1000 Torr, more preferably atmospheric pressure. However, a vacuum ambient is also possible for thermal annealing as well as any other post-treating means. The temperature is preferably 200-500 °C, and the temperature ramp rate is from 0.1 to 100 deg °C/min. The total annealing time is preferably from 0.01 min to 12 hours.

**[0070]** Chemical treatment of the OSG film is conducted under the following conditions.

**[0071]** The use of fluorinating (HF, SiF<sub>4</sub>, NF<sub>3</sub>, F<sub>2</sub>, COF<sub>2</sub>, CO<sub>2</sub>F<sub>2</sub>, etc.), oxidizing (H<sub>2</sub>O<sub>2</sub>, O<sub>3</sub>, etc.), chemical drying, methylating, or other chemical treatments that enhance the properties of the final material. Chemicals used in such treatments can be in solid, liquid, gaseous and/or supercritical fluid states.

**[0072]** Supercritical fluid post-treatment for selective removal of porogens from an organosilicate film is conducted under the following conditions.

**[0073]** The fluid can be carbon dioxide, water, nitrous oxide, ethylene, SF<sub>6</sub>, and/or other types of chemicals. Other chemicals can be added to the supercritical fluid to enhance the process. The chemicals can be inert (e.g., nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing (e.g., oxygen, ozone, nitrous oxide, etc.), or reducing (e.g., dilute or concentrated hydrocarbons, hydrogen, etc.). The temperature is preferably ambient to 500°C. The chemicals can also include larger chemical species such as surfactants. The total exposure time is preferably from 0.01 min to 12 hours.

**[0074]** Plasma treating for selective removal of labile groups and possible chemical modification of the OSG film is conducted under the following conditions.

**[0075]** The environment can be inert (nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing (e.g., oxygen, air, dilute oxygen environments, enriched oxygen environments, ozone, nitrous oxide, etc.), or reducing (e.g., dilute or concentrated hydrogen, hydrocarbons (saturated, unsaturated, linear or branched, aromatics), etc.). The plasma power is preferably 0-5000 W. The temperature is preferably ambient to 500°C. The pressure is preferably 10 mtorr to atmospheric pressure. The total curing time is preferably 0.01 min to 12 hours.

**[0076]** Photocuring for selective removal of porogens from an organosilicate film is conducted under the following conditions.

**[0077]** The environment can be inert (e.g., nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing (e.g., oxygen, air, dilute oxygen environments, enriched oxygen environments, ozone, nitrous oxide, etc.), or reducing (e.g., dilute or concentrated hydrocarbons, hydrogen, etc.). The temperature is preferably ambient to 500°C. The power is preferably 0 to 5000 W. The wavelength is preferably IR, visible, UV or deep UV (wavelengths < 200nm). The total curing time is preferably 0.01 min to 12 hours.

**[0078]** Microwave post-treatment for selective removal of porogens from an organosilicate film is conducted under the following conditions.

**[0079]** The environment can be inert (e.g., nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing (e.g., oxygen, air, dilute oxygen environments, enriched oxygen environments, ozone, nitrous oxide, etc.), or reducing (e.g., dilute or concentrated hydrocarbons, hydrogen, etc.). The temperature is preferably ambient to 500°C. The power and wavelengths are varied and tunable to specific bonds. The total curing time is preferably from 0.01 min to 12 hours.

**[0080]** Electron beam post-treatment for selective removal of porogens or specific chemical species from an organosilicate film and/or improvement of film properties is conducted under the following conditions.

**[0081]** The environment can be vacuum, inert (e.g., nitrogen, CO<sub>2</sub>, noble gases (He, Ar, Ne, Kr, Xe), etc.), oxidizing

(e.g., oxygen, air, dilute oxygen environments, enriched oxygen environments, ozone, nitrous oxide, etc.), or reducing (e.g., dilute or concentrated hydrocarbons, hydrogen, etc.). The temperature is preferably ambient to 500°C. The electron density and energy can be varied and tunable to specific bonds. The total curing time is preferably from 0.001 min to 12 hours, and may be continuous or pulsed. Additional guidance regarding the general use of electron beams is available in publications such as: S. Chattopadhyay et al., Journal of Materials Science, 36 (2001) 4323-4330; G. Kloster et al., Proceedings of IITC, June 3-5, 2002, SF, CA; and U.S. Pat. Nos. 6,207,555 B1, 6,204,201 B1 and 6,132,814 A1. The use of electron beam treatment may provide for porogen removal and enhancement of film mechanical properties through bond-formation processes in matrix.

**[0082]** The invention will be illustrated in more detail with reference to the following Examples, but it should be understood that the present invention is not deemed to be limited thereto.

#### EXAMPLES

**[0083]** All experiments were performed on an Applied Materials Precision-5000 system in a 200mm DxZ chamber fitted with an Advance Energy 2000 rf generator, using an undoped TEOS process kit. The recipe involved the following basic steps: initial set-up and stabilization of gas flows, deposition, and purge/evacuation of chamber prior to wafer removal. Films were annealed in a tube furnace at 425°C for 4 hours under N<sub>2</sub>.

**[0084]** Thickness and refractive index were measured on an SCI Filmtek 2000 Reflectometer. Dielectric constants were determined using Hg probe technique on low resistivity p-type wafers (< 0.02 ohm-cm). Mechanical properties were determined using MTS Nano Indenter. Thermal stability and off-gas products were determined by thermogravimetric analysis on a Thermo TA Instruments 2050 TGA. Compositional data were obtained by x-ray photoelectron spectroscopy (XPS) on a Physical Electronics 5000LS. The atomic% values reported in the tables do not include hydrogen.

**[0085]** Three routes were chosen for introducing porosity into an OSG film. The first route investigated to produce low k films with  $k < 2.6$  co-deposited a thermally labile organic oligomer as the porogen along with the OSG by plasma enhanced chemical vapor deposition (PECVD) and then removed the oligomer post-deposition in a thermal annealing step.

#### Example 1A

**[0086]** Alpha-terpinene (ATP) was co-deposited with diethoxymethylsilane (DEMS) onto a silicon wafer via PECVD in an oxidant-free environment. The process conditions were 700 milligrams per minute (mgm) flow of a 39.4% (by volume) mixture of ATP in DEMS. A carrier gas flow of 500 sccm of CO<sub>2</sub> was used to escort the chemicals into the deposition chamber. Further process conditions were as follows: a chamber pressure of 5 Torr, wafer chuck temperature of 150°C, showerhead to wafers spacing of 0.26 inches, and plasma power of 300 watts for a period of 180 seconds. The film as deposited had a thickness of 650 nm and a dielectric constant of 2.8. The film was annealed at 425°C under nitrogen for 4 hours to remove substantially all of the incorporated ATP, as evidenced by XPS. FIG. 1 shows infrared spectra of the film before (dashed line) and after (solid line) annealing, indicating the elimination of the porogen. The annealed film had a thickness of 492 nm and a dielectric constant of 2.4 (see Table 2 below). FIG. 4 shows a thermogravimetric analysis of the film to demonstrate weight loss occurring during thermal treatments.

#### Example 1B

**[0087]** ATP was co-deposited with DEMS onto a silicon wafer via PECVD in an oxidant-free environment. The process conditions were 1300 milligrams per minute (mgm) flow of a 70% (by volume) mixture of alpha-terpinene in DEMS. A carrier gas flow of 500 sccm of CO<sub>2</sub> was used to entrain the chemicals into the gas flow into the deposition chamber. Further process conditions were as follows: a chamber pressure of 8 Torr, wafer chuck temperature of 200°C, showerhead to wafers spacing of 0.30 inches, and plasma power of 600 watts for a period of 120 seconds. The film as deposited had a thickness of 414 nm and a dielectric constant of 2.59. The film was annealed at 425°C under nitrogen for 4 hours to remove substantially all the incorporated ATP. The annealed film had a thickness of 349 nm and a dielectric constant of 2.14 (see Table 2 below).

#### Example 1C

**[0088]** A film was prepared and annealed substantially in accordance with Example 1A except that the anneal was conducted at a reduced temperature of 400°C. The infrared spectrum of the resulting film, including wavenumbers, is shown in FIG. 2. The infrared spectrum of the porogen, ATP, is shown in FIG. 3 for comparison.



## Example 1D (Comparative)

5 [0089] A film was prepared and annealed substantially in accordance with Example 1A except that no porogens were used. The film had a dielectric constant of 2.8, and a composition substantially identical to the annealed film of Example 1A (see Tables 1 and 2).

## Example 1E (Comparative)

10 [0090] A film was prepared and annealed substantially in accordance with Example 1D except that the plasma power was 400 watts. The film had a dielectric constant of 2.8, and a composition substantially identical to the annealed film of Example 1A (see Tables 1 and 2).

## Example 1F

15 [0091] A film was prepared and annealed substantially in accordance with Example 1A except that the process conditions were 1000 milligrams per minute (mgm) flow of a 75% (by volume) mixture of alpha-terpinene (ATP) in di-t-butoxymethylsilane (DtBOMS). A carrier gas flow of 500 sccm of CO<sub>2</sub> was used to escort the chemicals into the deposition chamber. Further process conditions were as follows: a chamber pressure of 7 Torr, wafer chuck temperature of 215 °C, showerhead to wafers spacing of 0.30 inches, and plasma power of 400 watts for a period of 240 seconds.  
20 The film as deposited had a thickness of 540 nm and a dielectric constant of 2.8. The film was annealed at 425°C under nitrogen for 4 hours to remove substantially all the incorporated alpha-terpinene. The annealed film had a thickness of 474 nm and a dielectric constant of 2.10. The modulus and hardness were 2.23 and 0.18 GPa, respectively.

## Example 1G

25 [0092] ATP was co-deposited with DtBOMS onto a silicon wafer via PECVD in an oxidant-free environment. The process conditions were 700 milligrams per minute (mgm) flow of a 75% (by volume) mixture of ATP in DtBOMS. A carrier gas flow of 500 sccm of CO<sub>2</sub> was used to escort the chemicals into the deposition chamber. Further process conditions were as follows: a chamber pressure of 9 Torr, wafer chuck temperature of 275 °C, showerhead to wafers spacing of 0.30 inches, and plasma power of 600 watts for a period of 240 seconds. The film as deposited had a thickness of 670 nm and a dielectric constant of 2.64. The film was annealed at 425 °C under nitrogen for 4 hours to remove substantially all the incorporated ATP. The annealed film had a thickness of 633 nm and a dielectric constant of 2.19. The modulus and hardness were 3.40 and 0.44 GPa, respectively.

## Example 2

35 [0093] The second route investigated to produce low k films with  $k < 2.6$  used a single source organosilane precursor which included a thermally labile organic functionality as part of the molecular structure. The potential advantage of attaching the thermally labile group to a silica precursor is improved incorporation of the thermally labile group into the film. In order to investigate this route, we synthesized the molecule neo-hexyl-tetramethylcyclotetrasiloxane (neo-hexyl-TMCTS), in which a neo-hexyl group was grafted onto the TMCTS framework. The process conditions used in this test were 500 mgm flow of neohexyl-TMCTS and a carrier gas flow of 500 sccm of CO<sub>2</sub>, a chamber pressure of 6 Torr, wafer chuck temperature of 150 °C, showerhead to wafers spacing of 0.32 inches, and plasma power of 300 watts for a period of 90 seconds. Thickness of the as-deposited film was 1120 nm with a dielectric constant of 2.7. The film was annealed at 425°C for 4 hours under N<sub>2</sub>. Film thickness was reduced to 710 nm and the dielectric constant to 2.5. Films deposited from the TMCTS at 150°C had a dielectric constant as-deposited of 2.8, which did not change after thermal annealing at 425°C for 4 hours.

## Example 3

50 [0094] A third route investigated to produce low k films with  $k < 2.6$  was to physically mix an organosilicon precursor with a silica precursor having a large thermally labile group attached to it. To prove the efficacy of this route, fufuroxydimethylsilane was co-deposited with TMCTS at the following conditions; 1000 mgm flow of an 11% mixture of fufuroxydimethylsilane in TMCTS and a carrier gas flow of 500 sccm of He, a chamber pressure of 6 Torr, wafer chuck temperature of 150 °C, showerhead to wafers spacing of 0.26 inches, and plasma power of 300 watts for a period of 40 seconds. Thickness of the as-deposited film was 1220 nm with a dielectric constant of 3.0. The inclusion of the fufuroxy was indicated by FTIR in the as-deposited films. After thermal post-treatments at 400 °C in nitrogen for 1 hour the k was reduced to 2.73. It is likely in this case that there was remaining a significant portion of the incorporated

furfuroxy groups even after thermal anneal.

[0095] The preceding examples indicate the ability to incorporate a variety of functional groups into as-deposited films, and more critically the importance of the proper choice of the porogen to enable materials with  $k < 2.6$ . A variety of other porogens can also function using these routes. To provide optimum low dielectric constant materials with  $k < 2.6$  requires good network-forming organosilane/organosiloxane precursors which can provide the proper type and amount of organic-group incorporation in the OSG network. It is preferred that network-forming precursors which do not require the addition of oxidant to produce OSG films be used. This is of particular importance when using hydrocarbon-based pore-forming precursors which are susceptible to oxidation. Oxidation may cause significant modification of the pore-former during deposition which could hamper its ability to be subsequently removed during annealing processes.

Table 1.

XPS Data						
Example	Description	C	O	N	Si	Conditions
1A	DEMS-ATP	51.8	25.6	ND	22.6	150°C, 300W
1A	Annealed	24.5	43.1	ND	32.4	425°C, 4 hrs.
1E	DEMS	28.8	38.8	ND	32.4	150°C, 400W
1E	Annealed	25.1	41.4	ND	33.5	425°C, 4 hrs.
1D	DEMS	27.0	40.6	ND	32.4	150°C, 300W
1D	Annealed	23.4	42.7	ND	33.9	425°C, 4 hrs.

- all compositional analysis after 30 sec Ar sputter to clean surface; inherent measurement error +/- 2 atomic%.
- Note: Hydrogen cannot be determined by XPS; atomic compositions shown are normalized without hydrogen

Table 2.

Film Property Data						
Example	Description	K	Refractive Index	$\Delta$ Thickness (%)	H (GPa)	M (GPa)
1D; 1E	Various DEMS (as-deposited)	2.9-3.1	1.435	-	0.30-0.47	2.4-3.5
1D; 1E	Various DEMS (post-treated)	2.80	1.405	7-10	-	-
1A	DEMS-ATP (as-deposited)	2.80	1.490	-	-	-
1A	DEMS-ATP(post-treated)	2.41	1.346	22	0.36	3.2
1B	DEMS-ATP (as-deposited)	2.59		-	-	-
1B	DEMS-ATP (post-treated)	2.14		16		
1F	DtBOMS-ATP (as-deposited)	2.80	1.491	-	-	-
1F	DtBOMS-ATP (post-treated)	2.10	1.315	12	0.18	2.2
1G	DtBOMS-ATP (as-deposited)	2.64	1.473	-	-	-

Table 2. (continued)

Film Property Data						
Example	Description	K	Refractive Index	$\Delta$ Thickness (%)	H (GPa)	M (GPa)
1G	DtBOMS-ATP (post-treated)	2.19	1.334	5.5	0.44	3.4
Note: all depositions performed at 150°C, hardness (H) and modulus (M) determined by nanoindentation.						

[0096] Comparison of the IR spectrum of as-deposited and N<sub>2</sub> thermal post-treated DEMS/ATP films shows that thermal post-treatment in an inert atmosphere is successful for selective removal of porogen and retention of the OSG lattice. There is essentially no change in the Si-CH<sub>3</sub> absorption at 1275 cm<sup>-1</sup> after thermal anneal (the Si-CH<sub>3</sub> is associated with the OSG network). However, there is seen a dramatic reduction in C-H absorptions near 3000 cm<sup>-1</sup> suggesting that essentially all the carbon associated with ATP has been removed. The IR spectrum for ATP is shown for reference in FIG. 3. An added benefit of this anneal appears to be a significant reduction in the Si-H absorption at 2240 and 2170 cm<sup>-1</sup> which should render the film more hydrophobic. Thus, in certain embodiments of the invention, each Si atom of the film is bonded to not more than one H atom. However, in other embodiments, the number of H atoms bonded to Si atoms is not so limited.

[0097] Compositional analysis indicates that the DEMS-ATP film after anneal of 425 °C for 4 hrs (Example 1A) has essentially identical composition to a DEMS films deposited and annealed in the same manner (Example 1 D). The DEMS-ATP film prior to anneal indicates a substantially larger amount of carbon-based material in the film (IR analysis supports that this carbon-based material is very similar to ATP - see FIG. 3). This supports the assertion that the porogen material incorporated into a DEMS film when co-deposited with ATP is essentially completely removed by the thermal post-treatment process. Thermogravimetric analysis (FIG. 4) further indicates that significant weight loss of the as-deposited material is experienced when heated to temperatures above 350 °C, which is additional proof of porogen removal during annealing. The observed film shrinkage is likely caused by collapse of some portion of the OSG network upon removal of the porogen. However, there is little loss of organic groups from the OSG network, i.e., terminal methyl groups within the DEMS are mostly retained (see the XPS data of pre and post thermal treatment for DEMS film shown in Table 1). This is supported by the relatively equivalent Si-CH<sub>3</sub> bands at ~1275 wavenumbers in the IR spectrum. Hydrophobicity of this material is substantiated by the lack of Si-OH groups in the IR spectrum. The decrease in refractive index and dielectric constants of the films post-annealing suggests that they are less dense than the pre-annealed film, despite the decrease in film thickness. Positron Annihilation Lifetime Spectroscopy (PALS) indicates pore sizes for samples 1A, 1 B, and 1 F in the range of ~ 1.5nm equivalent spherical diameter. Also, unlike the work of Grill et al (referenced in the introduction), analysis of the thickness loss in conjunction with the compositional change (Example 1A) indicates that the OSG network is retained during anneal and not significantly degraded.

[0098] The present invention has been set forth with regard to several preferred embodiments, but the scope of the present invention is considered to be broader than those embodiments and should be ascertained from the claims below.

## Claims

1. A chemical vapor deposition method for producing a porous organosilica glass film represented by the formula Si<sub>v</sub>O<sub>w</sub>C<sub>x</sub>H<sub>y</sub>F<sub>z</sub>, where v+w+x+y+z = 100%, v is from 10 to 35 atomic%, w is from 10 to 65 atomic%, x is from 5 to 30 atomic%, y is from 10 to 50 atomic% and z is from 0 to 15 atomic%, preferably v is from 20 to 30 atomic%, w is from 20 to 45 atomic%, x is from 5 to 20 atomic%, y is from 15 to 40 atomic% and z is 0; said method comprising:

providing a substrate within a vacuum chamber;

introducing into the vacuum chamber gaseous reagents including at least one precursor selected from the group consisting of an organosilane and an organosiloxane, and a porogen;

applying energy to the gaseous reagents in the vacuum chamber to induce reaction of the gaseous reagents to deposit a preliminary film on the substrate, wherein the preliminary film contains the porogen, and the preliminary film is deposited without added oxidants when the porogen is distinct from the at least one precursor; and

removing from the preliminary film substantially all of the porogen to provide the porous film with pores and a dielectric constant less than 2.6, preferably 1.9.

2. The method of claim 1, wherein z is 0.5 to 7 atomic%, the at least one fluorination agent is selected from the group

consisting of  $\text{SiF}_4$ ,  $\text{NF}_3$ ,  $\text{F}_2$ ,  $\text{COF}_2$ ,  $\text{CO}_2\text{F}_2$  and  $\text{HF}$  and is used to introduce F to the porous film, and substantially all F in the porous film is bonded to Si in Si-F groups.

3. The method of claim 1, wherein most of the hydrogen in the porous film is bonded to carbon.

4. The method of claim 1, wherein the porous film has a density less than 1.5 g/ml.

5. The method of claim 1, wherein the pores have an equivalent spherical diameter less than or equal to 5 nm.

6. The method of claim 1, wherein the porogen is distinct from the at least one precursor.

7. The method of claim 6, wherein the at least one precursor is represented by:

(a) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3 and p is 0 to 3;

(b) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-O-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  and  $\text{R}^6$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$  and  $m+q \leq 3$ ;

(c) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  and  $\text{R}^6$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$  and  $m+q \leq 3$ ;

(d) the formula  $\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^4)_{3-n-p}\text{Si-R}^7\text{-SiR}^3_m(\text{O}(\text{O})\text{CR}^5)_q(\text{OR}^6)_{3-m-q}$  where  $\text{R}^1$  and  $\text{R}^3$  are independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$ ,  $\text{R}^6$  and  $\text{R}^7$  are independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^4$  and  $\text{R}^5$  are independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ , and  $m+q \leq 3$ ;

(e) the formula  $(\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si})_t\text{CH}_{4-t}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that  $n+p \leq 4$ ;

(f) the formula  $(\text{R}^1_n(\text{OR}^2)_p(\text{O}(\text{O})\text{CR}^3)_{4-(n+p)}\text{Si})_t\text{NH}_{3-t}$  where  $\text{R}^1$  is independently H or  $\text{C}_1$  to  $\text{C}_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $\text{R}^2$  is independently  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $\text{R}^3$  is independently H,  $\text{C}_1$  to  $\text{C}_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that  $n+p \leq 4$ ;

(g) cyclic siloxanes of the formula  $(\text{OSiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8,;

(h) cyclic silazanes of the formula  $(\text{NR}_1\text{SiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8; or

(i) cyclic carbosilanes of the formula  $(\text{CR}_1\text{R}_3\text{SiR}_1\text{R}_3)_x$ , where  $\text{R}^1$  and  $\text{R}^3$  are independently H,  $\text{C}_1$  to  $\text{C}_4$ , linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8.

8. The method of claim 6, wherein the at least one precursor is a member selected from the group consisting of diethoxymethylsilane, dimethoxymethylsilane, di-isopropoxymethylsilane, di-t-butoxymethylsilane, methyltriethoxysilane, methyltrimethoxysilane, methyltri-isopropoxysilane, methyltri-t-butoxysilane, dimethyldimethoxysilane, dimethyldiethoxysilane, dimethyldi-isopropoxysilane, dimethyldi-t-butoxysilane, 1,3,5,7-tetramethylcyclotetrasiloxane, octamethyl-cyclotetrasiloxane and tetraethoxysilane.
9. The method of claim 1, wherein said at least one precursor is a mixture of a first organosilicon precursor with two or fewer Si-O bonds with a second organosilicon precursor with three or more Si-O bonds, and the mixture is provided to tailor a chemical composition of the porous film.
10. The method of claim 1, wherein the porogen is at least one member selected from the group consisting of:
- (a) at least one cyclic hydrocarbon having a cyclic structure and the formula  $C_nH_{2n}$ , where n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one cyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure;
  - (b) at least one linear or branched, saturated, singly or multiply unsaturated hydrocarbon of the general formula  $C_nH_{(2n+2)-2y}$  where  $n = 2 - 20$  and where  $y = 0 - n$ ;
  - (c) at least one singly or multiply unsaturated cyclic hydrocarbon having a cyclic structure and the formula  $C_nH_{2n-2x}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one singly or multiply unsaturated cyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents;
  - (d) at least one bicyclic hydrocarbon having a bicyclic structure and the formula  $C_nH_{2n-2}$ , where n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one bicyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the bicyclic structure;
  - (e) at least one multiply unsaturated bicyclic hydrocarbon having a bicyclic structure and the formula  $C_nH_{2n-(2+2x)}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one multiply unsaturated bicyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the bicyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents; and
  - (f) at least one tricyclic hydrocarbon having a tricyclic structure and the formula  $C_nH_{2n-4}$ , where n is 4 to 14, a number of carbons in the tricyclic structure is from 4 to 12, and the at least one tricyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituted onto the cyclic structure.
11. The method of claim 1, wherein the porogen is at least one member selected from the group consisting of alpha-terpinene, limonene, cyclohexane, 1,2,4-trimethylcyclohexane, 1,5-dimethyl-1,5-cyclooctadiene, camphene, adamantane, 1,3-butadiene, substituted dienes and decahydronaphthelene.
12. The method of claim 1, wherein the at least one precursor contains at least one porogen bonded thereto.
13. The method of claim 12, wherein the gaseous reagents further include at least one porogen-free precursor selected from the group consisting of an organosilane and an organosiloxane.
14. The method of claim 12, wherein the removing step leaves a methyl group attached to Si where the porogen was previously attached.
15. The method of claim 12, wherein the at least one precursor is represented by:
- (a) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3 and p is 0 to 3, provided that  $n+p \leq 4$ , and that at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
  - (b) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with

a C<sub>3</sub> or larger hydrocarbon as the porogen;

(c) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup>, R<sup>4</sup>, R<sup>5</sup> and R<sup>6</sup> are independently C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3, m+q ≤ 3, and at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(d) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-R^7-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup>, R<sup>4</sup>, R<sup>5</sup>, R<sup>6</sup>, and R<sup>7</sup> are independently C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3, m+q ≤ 3, and at least one of R<sup>1</sup>, R<sup>3</sup> and R<sup>7</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(e) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tCH_{4-t}$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>3</sup> are independently C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that n+p ≤ 4 and at least one of R<sup>1</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(f) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tNH_{3-t}$  where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>3</sup> are independently C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that n+p ≤ 4 and at least one of R<sup>1</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(g) cyclic siloxanes of the formula  $(OSiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen;

(h) cyclic silazanes of the formula  $(NR_1SiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen; or

(i) cyclic carbosilanes of the formula  $(CR_1R_3SiR_1R_3)_x$ , where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>12</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x is any integer from 2 to 8, provided that at least one of R<sup>1</sup> and R<sup>3</sup> is substituted with a C<sub>3</sub> or larger hydrocarbon as the porogen.

16. The method of claim 12, wherein the at least one precursor is a member selected from the group consisting of 1-neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane, 1-neopentyl-1,3,5,7-tetramethylcyclotetrasiloxane, neopentyldiethoxysilane, neohexyldiethoxysilane, neohexyltriethoxysilane, neopentyltriethoxysilane and neopentyl-di-t-butoxysilane.

17. A porous organosilica glass film produced by the method of claim 1, said film consisting of a single phase of a material represented by the formula  $Si_vO_wC_xH_yF_z$ , where v+w+x+y+z = 100%, v is from 10 to 35 atomic%, w is from 10 to 65 atomic%, x is from 5 to 30 atomic%, y is from 10 to 50 atomic% and z is from 0 to 15 atomic%, wherein the film has pores and a dielectric constant less than 2.6, preferably v is from 20 to 30 atomic%, w is from 20 to 45 atomic%, x is from 5 to 25 atomic%, y is from 15 to 40 atomic% and z is 0.

18. The film of claim 17, wherein z is 0.5 to 7 atomic% and substantially all F in the porous film is bonded to Si in Si-F groups.

19. The film of claim 17, wherein most of the hydrogen is bonded to carbon.

20. Neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane.

21. Trimethylsilylethyl-1,3,5,7-tetramethylcyclotetrasiloxane.

22. A composition comprising 1,3,5,7-tetramethylcyclotetrasiloxane substituted with a porogen.

## 23. A composition comprising:

(A) at least one porogenated precursor represented by:

- 5 (1) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3 and  $p$  is 0 to 3, provided that  $n+p \leq 4$ , and that at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 10 (2) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 15 (3) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$  and  $R^6$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 20 (4) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-R^7-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$ ,  $R^4$ ,  $R^5$ ,  $R^6$ , and  $R^7$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 0 to 3,  $m$  is 0 to 3,  $q$  is 0 to 3 and  $p$  is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$ ,  $m+q \leq 3$ , and at least one of  $R^1$ ,  $R^3$  and  $R^7$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 25 (5) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tCH_{4-t}$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3,  $p$  is 0 to 3, and  $t$  is 2 to 4, provided that  $n+p \leq 4$  and at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 30 (6) the formula  $(R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si)_tNH_{3-t}$  where  $R^1$  is independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^3$  are independently  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3,  $p$  is 0 to 3 and  $t$  is 1 to 3, provided that  $n+p \leq 4$  and at least one of  $R^1$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 35 (7) cyclic siloxanes of the formula  $(OSiR^1R^3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen;
- 40 (8) cyclic silazanes of the formula  $(NR^1SiR^1R^3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen; or
- 45 (9) cyclic carbosilanes of the formula  $(CR^1R^3SiR^1R^3)_x$ , where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_{12}$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and  $x$  is any integer from 2 to 8, provided that at least one of  $R^1$  and  $R^3$  is substituted with a  $C_3$  or larger hydrocarbon as the porogen, or
- 50

(B)(1) at least one precursor selected from the group consisting of:

- 55 (a) the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  is independently  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $R^3$  is independently H,  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $n$  is 1 to 3 and  $p$  is 0 to 3;
- (b) the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-p}$  where  $R^1$  and  $R^3$  are inde-

pendently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>6</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3 and m+q ≤ 3;

(c) the formula R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>4</sup>)<sub>3-n-p</sub>Si-SiR<sup>3</sup><sub>m</sub>(O(O)CR<sup>5</sup>)<sub>q</sub>(OR<sup>6</sup>)<sub>3-m-q</sub> where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> and R<sup>6</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3 and m+q ≤ 3;

(d) the formula R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>4</sup>)<sub>3-n-p</sub>Si-R<sup>7</sup>-SiR<sup>3</sup><sub>m</sub>(O(O)CR<sup>5</sup>)<sub>q</sub>(OR<sup>6</sup>)<sub>3-m-q</sub> where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup>, R<sup>6</sup> and R<sup>7</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, and n+p ≤ 3, and m+q ≤ 3;

(e) the formula (R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>3</sup>)<sub>4-(n+p)</sub>Si)<sub>t</sub>CH<sub>4-t</sub> where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that n+p ≤ 4;

(f) the formula (R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>3</sup>)<sub>4-(n+p)</sub>Si)<sub>t</sub>NH<sub>3-t</sub> where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that n+p ≤ 4;

(g) cyclic siloxanes of the formula (OSiR<sub>1</sub>R<sub>3</sub>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8;

(h) cyclic silazanes of the formula (NR<sub>1</sub>SiR<sub>1</sub>R<sub>3</sub>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8; and

(i) cyclic carbosilanes of the formula (CR<sub>1</sub>R<sub>3</sub>SiR<sub>1</sub>R<sub>3</sub>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8, and

(B)(2) a porogen distinct from the at least one precursor, said porogen being at least one of:

(a) at least one cyclic hydrocarbon having a cyclic structure and the formula C<sub>n</sub>H<sub>2n</sub>, where n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one cyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the cyclic structure;

(b) at least one linear or branched, saturated, singly or multiply unsaturated hydrocarbon of the general formula C<sub>n</sub>H<sub>(2n+2)-2y</sub> where n = 2 - 20 and where y = 0 - n;

(c) at least one singly or multiply unsaturated cyclic hydrocarbon having a cyclic structure and the formula C<sub>n</sub>H<sub>2n-2x</sub>, where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one singly or multiply unsaturated cyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituents substituted onto the cyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents;

(d) at least one bicyclic hydrocarbon having a bicyclic structure and the formula C<sub>n</sub>H<sub>2n-2</sub>, where n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one bicyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the bicyclic structure;

(e) at least one multiply unsaturated bicyclic hydrocarbon having a bicyclic structure and the formula



$C_nH_{2n-(2+2x)}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one multiply unsaturated bicyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituents substituted onto the bicyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents; and/or

(f) at least one tricyclic hydrocarbon having a tricyclic structure and the formula  $C_nH_{2n-4}$ , where n is 4 to 14, a number of carbons in the tricyclic structure is from 4 to 12, and the at least one tricyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the cyclic structure.

24. The composition of claim 23, wherein the porogen comprises at least one cyclic hydrocarbon having a cyclic structure and the formula  $C_nH_{2n}$ , where n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one cyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the cyclic structure.

25. The composition of claim 23, wherein the porogen comprises at least one linear or branched, saturated, singly or multiply unsaturated hydrocarbons of the general formula  $C_nH_{(2n+2)-2y}$  where  $n = 2 - 20$  and where  $y = 0 - n$ .

26. The composition of claim 23, wherein the porogen comprises at least one singly or multiply unsaturated cyclic hydrocarbon having a cyclic structure and the formula  $C_nH_{2n-2x}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the cyclic structure is between 4 and 10, and the at least one singly or multiply unsaturated cyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituents substituted onto the cyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents

27. The composition of claim 23, wherein the porogen comprises at least one bicyclic hydrocarbon having a bicyclic structure and the formula  $C_nH_{2n-2}$ , where n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one bicyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the bicyclic structure.

28. The composition of claim 23, wherein the porogen comprises at least one multiply unsaturated bicyclic hydrocarbon having a bicyclic structure and the formula  $C_nH_{2n-(2+2x)}$ , where x is a number of unsaturated sites, n is 4 to 14, a number of carbons in the bicyclic structure is from 4 to 12, and the at least one multiply unsaturated bicyclic hydrocarbon optionally contains a plurality of simple or branched hydrocarbons substituents substituted onto the bicyclic structure, and contains endocyclic unsaturation or unsaturation on one of the hydrocarbon substituents.

29. The composition of claim 23, wherein the porogen comprises at least one tricyclic hydrocarbon having a tricyclic structure and the formula  $C_nH_{2n-4}$ , where n is 4 to 14, a number of carbons in the tricyclic structure is from 4 to 12, and the at least one tricyclic hydrocarbon optionally contains a plurality of linear or branched hydrocarbons substituted onto the cyclic structure.

30. The composition of claim 23(B), wherein the at least one precursor is represented by the formula  $R^1_n(OR^2)_p(O(O)CR^3)_{4-(n+p)}Si$  where  $R^1$  is independently H or  $C_1$  to  $C_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  is independently  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $R^3$  is independently H,  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3 and p is 0 to 3.

31. The composition of claim 23(B), wherein the at least one precursor is represented by the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-O-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^6$  are independently  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon,  $R^4$  and  $R^5$  are independently H,  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that  $n+m \geq 1$ ,  $n+p \leq 3$  and  $m+q < 3$ .

32. The composition of claim 23(B), wherein the at least one precursor is represented by the formula  $R^1_n(OR^2)_p(O(O)CR^4)_{3-n-p}Si-SiR^3_m(O(O)CR^5)_q(OR^6)_{3-m-q}$  where  $R^1$  and  $R^3$  are independently H or  $C_1$  to  $C_4$  linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon;  $R^2$  and  $R^6$  are independently  $C_1$  to  $C_6$  linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon.

inated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3 and m+q ≤ 3.

- 5 33. The composition of claim 23(B), wherein the at least one precursor is represented by the formula R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>4</sup>)<sub>3-n-p</sub>-Si-R<sup>7</sup>-SiR<sup>3</sup><sub>m</sub>(O(O)CR<sup>5</sup>)<sub>q</sub>(OR<sup>6</sup>)<sub>3-m-q</sub> where R<sup>1</sup> and R<sup>3</sup> are independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup>, R<sup>6</sup> and R<sup>7</sup> are independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>4</sup> and R<sup>5</sup> are independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply  
10 unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 0 to 3, m is 0 to 3, q is 0 to 3 and p is 0 to 3, provided that n+m ≥ 1, n+p ≤ 3, and m+q ≤ 3.
- 15 34. The composition of claim 23(B), wherein the at least one precursor is represented by the formula (R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>3</sup>)<sub>4-(n+p)</sub>Si)CH<sub>4-t</sub> where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3, and t is 2 to 4, provided that n+p ≤ 4.
- 20 35. The composition of claim 23, wherein the at least one precursor is represented by the formula (R<sup>1</sup><sub>n</sub>(OR<sup>2</sup>)<sub>p</sub>(O(O)CR<sup>3</sup>)<sub>4-(n+p)</sub>Si)NH<sub>3-t</sub> where R<sup>1</sup> is independently H or C<sub>1</sub> to C<sub>4</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon; R<sup>2</sup> is independently C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, R<sup>3</sup> is independently  
25 H, C<sub>1</sub> to C<sub>6</sub> linear or branched, saturated, singly or multiply unsaturated, cyclic, aromatic, partially or fully fluorinated hydrocarbon, n is 1 to 3, p is 0 to 3 and t is 1 to 3, provided that n+p ≤ 4.
- 30 36. The composition of claim 23(B), wherein the at least one precursor is represented by cyclic siloxanes of the formula (OSiR<sup>1</sup>R<sup>3</sup>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8.
- 35 37. The composition of claim 23(B), wherein the at least one precursor is represented by cyclic silazanes of the formula (NR<sup>1</sup>SiR<sup>1</sup>R<sup>3</sup>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8.
38. The composition of claim 23(B), wherein the at least one precursor is represented by cyclic carbosilanes of the formula (CR<sup>1</sup>R<sup>3</sup>SiR<sup>1</sup>R<sup>3</sup>)<sub>x</sub>, where R<sup>1</sup> and R<sup>3</sup> are independently H, C<sub>1</sub> to C<sub>4</sub>, linear or branched, saturated, singly or multiply unsaturated, cyclic, partially or fully fluorinated hydrocarbon, and x may be any integer from 2 to 8.
- 40 39. A composition comprising at least one porogenated precursor selected from the group consisting of neohexyl-1,3,5,7-tetramethylcyclotetrasiloxane and trimethylsilyl-1,3,5,7-tetramethylcyclotetrasiloxane.
40. A composition comprising:
- (a)(i) at least one precursor selected from the group consisting of diethoxymethylsilane, dimethoxymethylsilane, di-isopropoxymethylsilane, di-t-butoxymethylsilane, methyltriethoxysilane, methyltrimethoxysilane, methyltri-isopropoxysilane, methyltri-t-butoxysilane, dimethyldimethoxysilane, dimethyldiethoxysilane, dimethyldi-isopropoxysilane, dimethyldi-t-butoxysilane, 1,3,5,7-tetramethylcyclotetrasiloxane, octamethyl-cyclotetrasiloxane and tetraethoxysilane, and (ii) a porogen distinct from the at least one precursor, said porogen being a member selected from the group consisting of alpha-terpinene, limonene, cyclohexane, 1,2,4-trimethylcyclohexane, 1,5-dimethyl-1,5-cyclooctadiene, camphene, adamantane, 1,3-butadiene, substituted dienes and decahydronaphthalene; and/or
- (b)(i) at least one precursor selected from the group consisting of trimethylsilane, tetramethylsilane, diethoxymethylsilane, dimethoxymethylsilane, ditertiarybutoxymethylsilane, methyltriethoxysilane, dimethyldimethoxysilane, dimethyldiethoxysilane, methyltriacetoxysilane, methylacetoxysilane, methylethoxydisiloxane, tetramethylcyclotetrasiloxane, octamethylcyclotetrasiloxane, dimethyldiacetoxysilane, bis(trimethoxysilyl)methane, bis(dimethoxysilyl)methane, tetraethoxysilane and triethoxysilane, and (ii) a porogen distinct from the at least one precursor, said porogen being a member selected from the group consisting of alpha-terpinene, gamma-terpinene, limonene, dimethylhexadiene, ethylbenzene, decahydronaphthalene, 2-carene,

3-carene, vinylcyclohexene and dimethylcyclooctadiene.

- 5 41. The method of claim 1, further comprising treating the preliminary film with at least one post-treating agent selected from the group consisting of thermal energy, plasma energy, photon energy, electron energy, microwave energy and chemicals, wherein the at least one post-treating agent removes from the preliminary film substantially all of the porogen to provide the porous organosilica glass film with pores and a dielectric constant less than 2.6.
- 10 42. The method of claim 41, wherein the at least one post-treating agent improves a property of the resulting porous organosilica glass film before, during and/or after removing substantially all of the porogen from the preliminary film.
43. The method of claim 42, wherein an additional post-treating agent improves a property of the resulting porous organosilica glass film before, during and/or after the at least one post-treating agent removes substantially all of the porogen from the preliminary film.
- 15 44. The method of any of claim 41 - 43, wherein the at least one post-treating agent is electron energy provided by an electron beam.
45. The method of claim 41, wherein the at least one post-treating agent is a supercritical fluid.

20

25

30

35

40

45

50

55

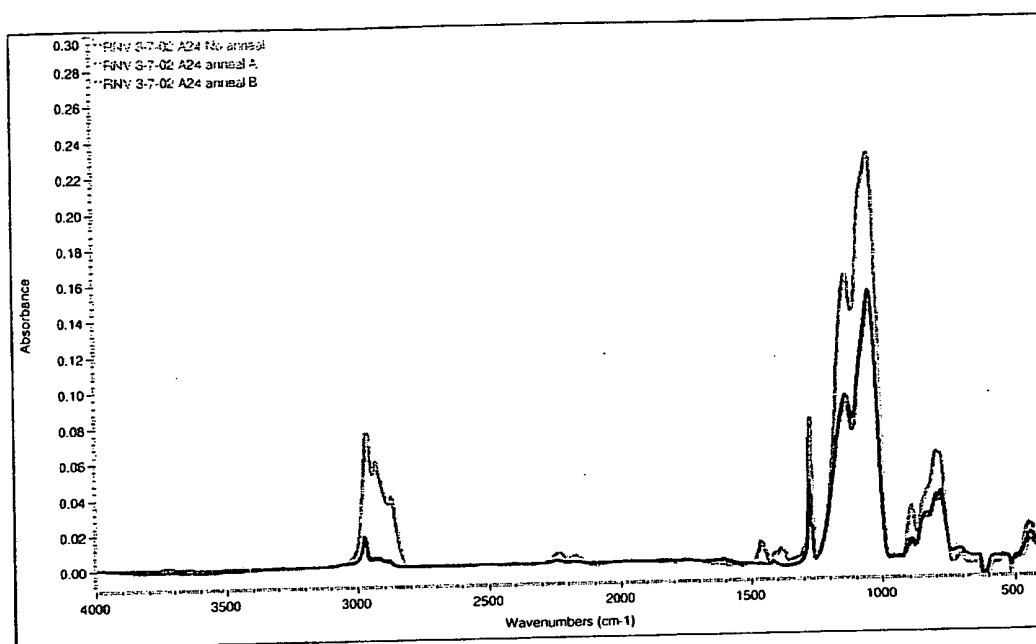


FIG. 1

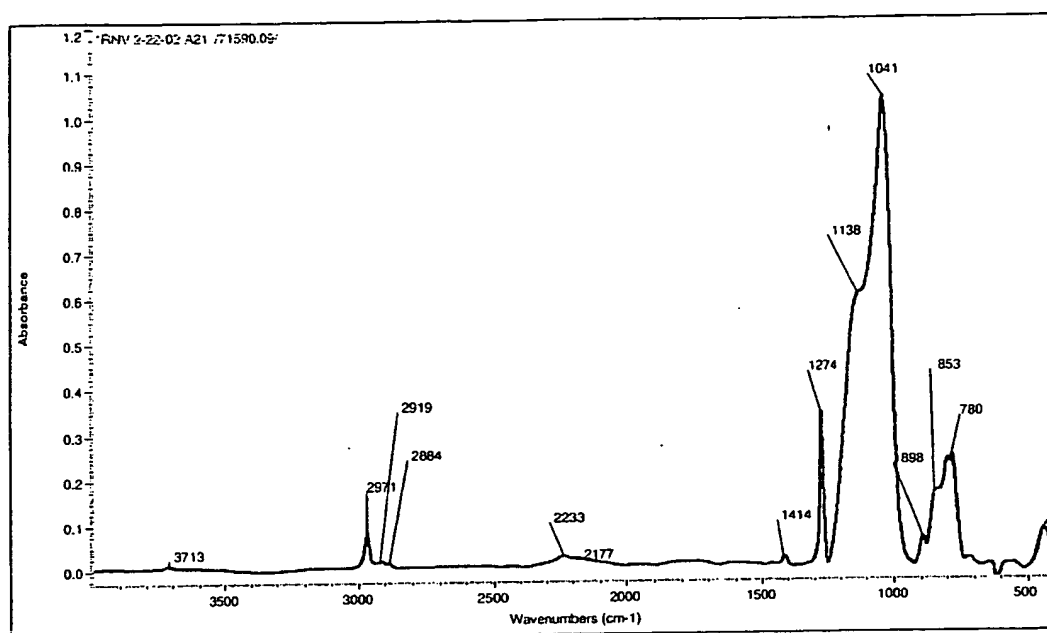


FIG. 2

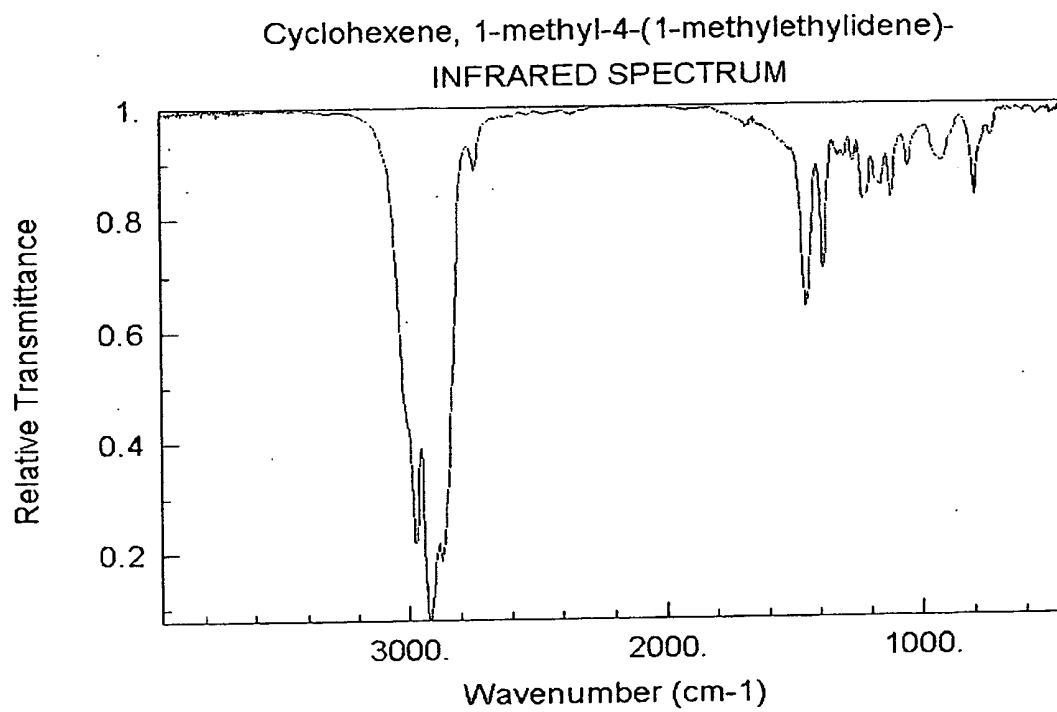


FIG. 3

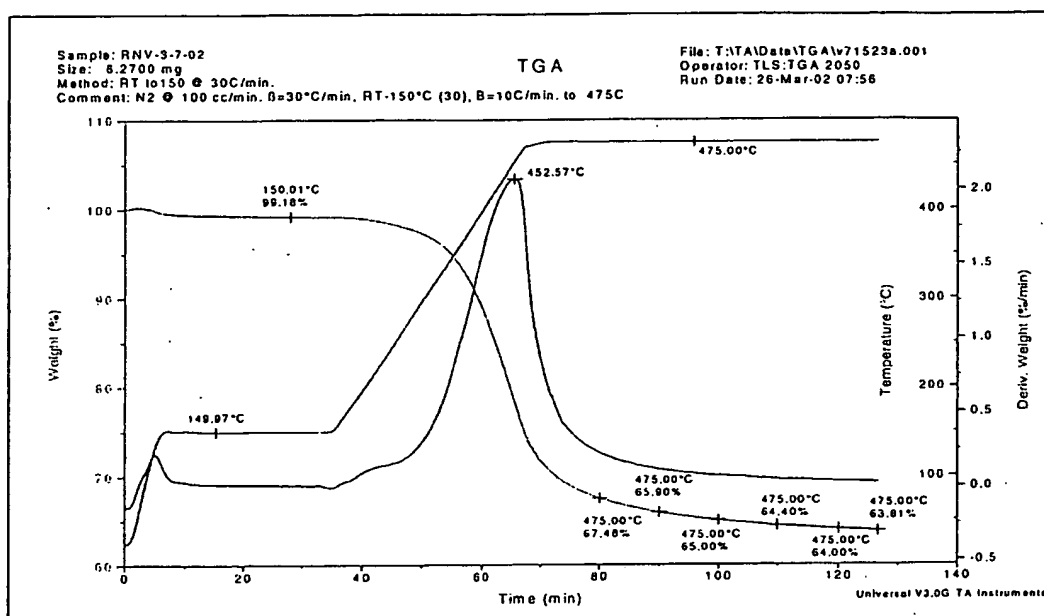


FIG. 4



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 03 00 8723

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	WO 02 11204 A (IBM) 7 February 2002 (2002-02-07)	22-24, 27, 29-34, 36, 40-42	C23C16/40
Y	* page 4, line 4 - line 26 *	5, 8, 9, 11-13, 15, 25, 26, 29, 35, 37, 38	
	* page 7, line 13 - line 32 *		
X, D	GRILL A ET AL: "ULTRALOW-K DIELECTRICS PREPARED BY PLASMA-ENHANCED CHEMICAL VAPOR DEPOSITION" APPLIED PHYSICS LETTERS, AMERICAN INSTITUTE OF PHYSICS, NEW YORK, US, vol. 79, no. 6, 6 August 2001 (2001-08-06), pages 803-805, XP001083189 ISSN: 0003-6951	1, 6, 7, 10, 17, 19, 41, 42	
Y	* the whole document *	2, 4, 5, 8, 9, 11-13, 15, 44	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C23C
A	GRILL A ET AL: "Low dielectric constant SiCOH films as potential candidates for interconnect dielectrics" MATERIALS RESEARCH SOCIETY SYMPOSIUM PROCEEDINGS, MATERIALS RESEARCH SOCIETY, PITTSBURG, PA, US, vol. 565, 5 April 1999 (1999-04-05), pages 107-116, XP001099051 ISSN: 0272-9172 * table 2 *	1-45	
X, D	US 6 054 206 A (MOUNTSIER THOMAS WELLER) 25 April 2000 (2000-04-25) * the whole document *	1, 41-43	
-/--			
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 1 August 2003	Examiner Ekhult, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P4001)





European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number

EP 03 00 8723

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GRILL A ET AL: "SiCOH dielectrics: from low- kappa to ultralow- kappa by PECVD" ADVANCED METALLIZATION CONFERENCE 2001 (AMC 2001). PROCEEDINGS OF THE CONFERENCE, ADVANCED METALLIZATION CONFERENCE 2001 (AMC 2001). PROCEEDINGS OF THE CONFERENCE, MONTREAL, QUE., CANADA, 29-31 OCT. 2001, pages 253-259, XP008019954 2001, Warrendale, PA, USA, Mater. Res. Soc, USA ISBN: 1-55899-670-2 * page 254, line 14 - page 255, line 9 *	1,3,6,8	
X	GRILL A ET AL: "NOVEL LOW-K DUAL-PHASE MATERIALS PREPARED BY PECVD" MATERIALS RESEARCH SOCIETY SYMPOSIUM PROCEEDINGS, MATERIALS RESEARCH SOCIETY, PITTSBURG, PA, US, vol. 612, April 2000 (2000-04), pages 1-7, XP001099050 ISSN: 0272-9172 * paragraph '0002!; figure 5 *	1	
Y	US 6 068 884 A (LOPATA EUGENE ET AL) 30 May 2000 (2000-05-30) * column 4, line 53 - column 6, line 48 *	2,37	TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Y	EP 1 077 477 A (APPLIED MATERIALS INC) 21 February 2001 (2001-02-21) * paragraph '0067! *	4	
Y	EP 1 119 035 A (APPLIED MATERIALS INC) 25 July 2001 (2001-07-25) * paragraphs '0020!-'0022! *	25,26,29	
Y	WO 01 29052 A (ALLIED SIGNAL INC) 26 April 2001 (2001-04-26) * claim 27 *	12,44	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>1 August 2003</b>	Examiner <b>Ekhult, H</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 (P04C01)



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 03 00 8723

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
Y	US 4 105 821 A (BLAICH BERNHARD ET AL) 8 August 1978 (1978-08-08) * claim 4 *	35	
Y	--- DATABASE WPI Section Ch, Week 199202 Derwent Publications Ltd., London, GB; Class A26, AN 1992-014228 XP002248743 & JP 03 265585 A (ISUZU CERAMICS RES INST CO LTD), 26 November 1991 (1991-11-26) * abstract *	38	
A	--- US 5 296 624 A (LARSON GERALD L ET AL) 22 March 1994 (1994-03-22) * table 1 *	16	
P,X	--- WO 02 43119 A (IBM) 30 May 2002 (2002-05-30)  * page 11, line 24 - page 13, line 16; example 1 * * page 20, line 12 - line 24 * -----	1, 3, 5-8, 12, 15-17, 19, 23-25, 27, 29, 36, 39	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
Place of search THE HAGUE		Date of completion of the search 1 August 2003	Examiner Ekhuft, H
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons a : member of the same patent family, corresponding document	

EPO FORM 1503 03 82 (P94C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 03 00 8723

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

01-08-2003

Patent document cited in search report			Publication date	Patent family member(s)	Publication date
WO 0211204	A	07-02-2002	WO	0211204 A1	07-02-2002
US 6054206	A	25-04-2000	US	6238751 B1	29-05-2001
US 6068884	A	30-05-2000	AU	3562799 A	16-11-1999
			CA	2330040 A1	04-11-1999
			CN	1302254 T	04-07-2001
			EP	1089874 A1	11-04-2001
			JP	2002513203 T	08-05-2002
			TW	476705 B	21-02-2002
			WO	9955526 A1	04-11-1999
EP 1077477	A	21-02-2001	EP	1077477 A1	21-02-2001
			US	2003008528 A1	09-01-2003
			US	6465372 B1	15-10-2002
EP 1119035	A	25-07-2001	US	6541367 B1	01-04-2003
			EP	1119035 A2	25-07-2001
			JP	2001298023 A	26-10-2001
			TW	472322 B	11-01-2002
			US	2002142585 A1	03-10-2002
			US	2002197849 A1	26-12-2002
WO 0129052	A	26-04-2001	US	6472076 B1	29-10-2002
			AU	1209701 A	30-04-2001
			EP	1222196 A1	17-07-2002
			JP	2003512383 T	02-04-2003
			WO	0129052 A1	26-04-2001
US 4105821	A	08-08-1978	DE	2536013 A1	03-03-1977
			AT	345058 B	25-08-1978
			AT	597876 A	15-12-1977
			ES	450687 A1	16-07-1977
			FR	2320363 A1	04-03-1977
			GB	1536720 A	20-12-1978
			IT	1065805 B	04-03-1985
			JP	52023580 A	22-02-1977
			NL	7608974 A	15-02-1977
			SE	7609029 A	14-02-1977
JP 3265585	A	26-11-1991	NONE		
US 5296624	A	22-03-1994	NONE		
WO 0243119	A	30-05-2002	US	6441491 B1	27-08-2002
			US	2002098714 A1	25-07-2002

EPO FORM P449

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

